

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



INTERNATIONAL PATENT COOPERATION TREATY (PCT)

(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/027167 A1

(51) International Patent Classification⁷: **E03C 1/22**,
1/20, 1/182, 1/14

Colln, William [AU/AU]; 5 Trellick Street, Modbury, S.A.
5092 (AU).

(21) International Application Number:
PCT/AU2003/001106

(74) Agent: **SPRUSON & FERGUSON**; G.P.O. Box 3898,
Sydney, NSW 2001 (AU).

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002951508 19 September 2002 (19.09.2002) AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PI, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **CAR-
OMA INDUSTRIES LIMITED** [AU/AU]; 10 Market
Street, Brisbane, QLD 4000 (AU).


(84) Designated States (*regional*): ARIPO patent (GI, GM,
KH, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO),

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **WOOLDRIDGE**.

(Continued on next page)

(54) Title: AN OUTLET ARRANGEMENT

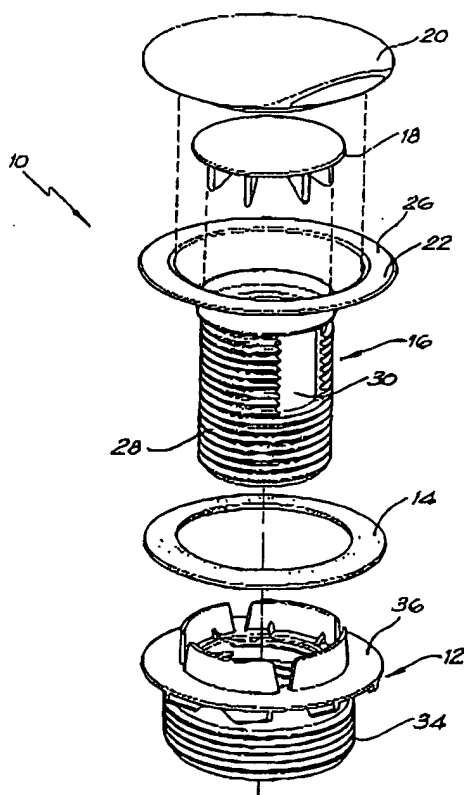

(57) Abstract: An outlet arrangement (10) for adapting a water receptacle (40b) having a smaller diameter outlet for use with a larger diameter waste outlet and trap. The arrangement (10) includes an outlet member (16) and a locking collar (12). The outlet member (16) has a first end (20) adapted to seal against an opening (46) of either the smaller or the larger diameter and a second threaded end (28) adapted to fit through an opening (42) of the smaller diameter. The locking collar (12) has an internal thread (32) adapted to engage with the second threaded end (28) of the outlet member (16) and an external thread (34) adapted to engage a waste outlet or trap of the larger diameter.

BEST AVAILABLE COPY

WO 2004/027167 A1